



# THE BEST SOLUTION FOR EFFICIENT OPERATIONS IN TERMS OF PERFORMANCE, SIZE AND RELIABILITY




## P 240 A Smart

#### **WORKING DIAGRAMS**

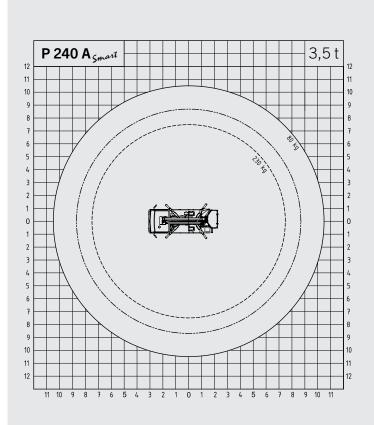

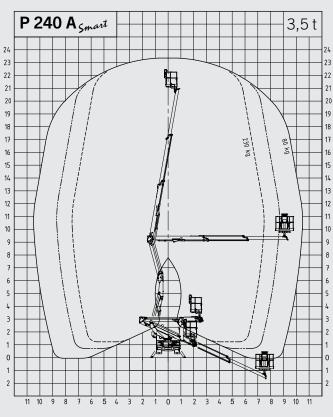

#### **DIMENSIONS**

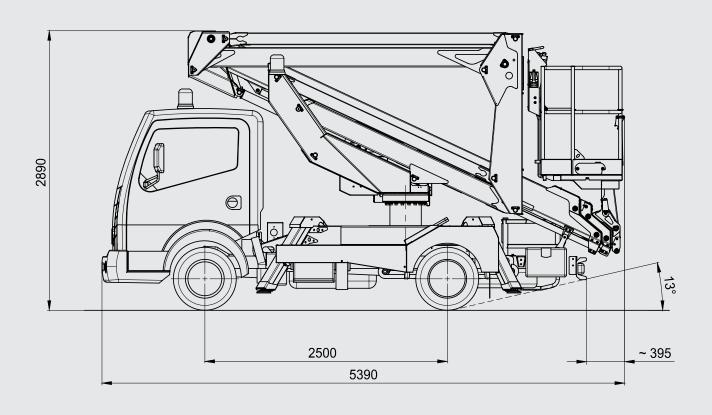






- → Small & clever for use in city centres
- → Compact design and easy operation
- Fully hydraulic operation
- → Ergonomic design
- Flexible access to heights thanks to combination of joint and telescope
- High manoeuvrability thanks to the extremely short wheelbase
- **尽** Safe working
- Professional PALFINGER quality

TECHNICAL SPECIFICATIONS	
Max. working height	23.2 m
Max. basket bottom height	21.2 m
Max. outreach	10.2 m
Angle of main boom	-25° to +80°
Rotation angle of turntable	370°
Rotation angle of basket	2 x 90°
Basket load	230 kg
Size of basket	1.4 x 0.85 x 1.1 m
Height in transport position	2.89 m
Width in transport position	2.1 m
Total length	5.39 m
Total weight	3350 kg

OPTIONAL
Fiberglass basket
Insulation 1000 V
Aluminium Side bars 200 mm
Electric motor 230 V
Working adjustable light 60 W on the basket
Customised paintwork boom
Aluminium Side bars 200 mm  Electric motor 230 V  Working adjustable light 60 W on the basket

### LIFETIME EXCELLENCE

THE RESULT IS PALFINGER ACCESS PLATFORMS FEATURING THE MOST STATE-OF-THE-ART HEIGHT TECHNOLOGY THAT ACHIEVE ABSOLUTE PEAK PERFORMANCES, EVEN WHEN CONFRONTED WITH THE MOST DIFFICULT OF JOBS IN PRACTICE. DEVELOPED FOR THE GLOBAL MARKET, DESIGNED FOR THE FUTURE.

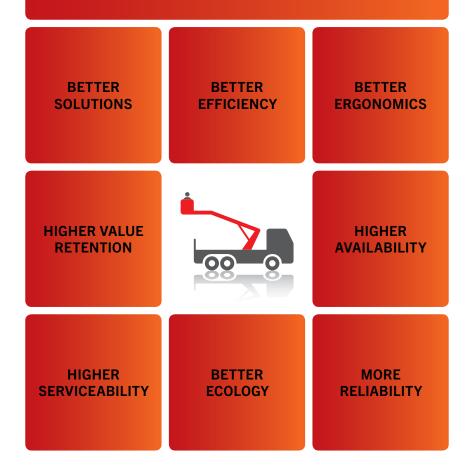

For further information please visit: www.palfinger.com/thebrand